



Top View

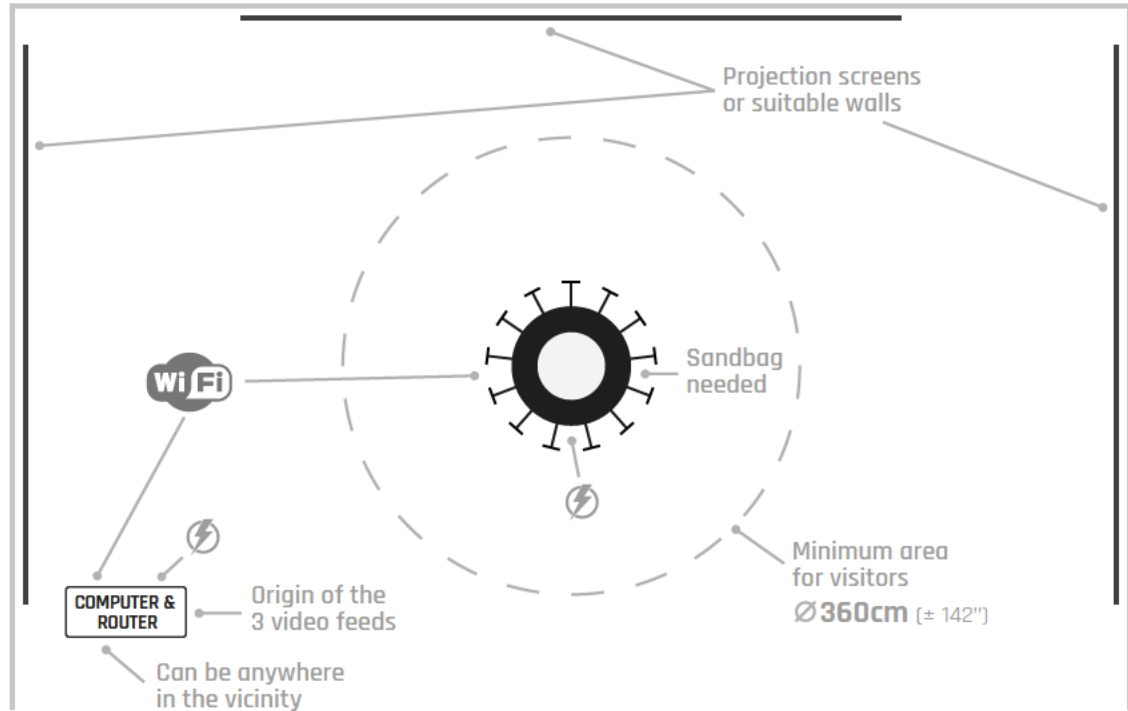

Side View

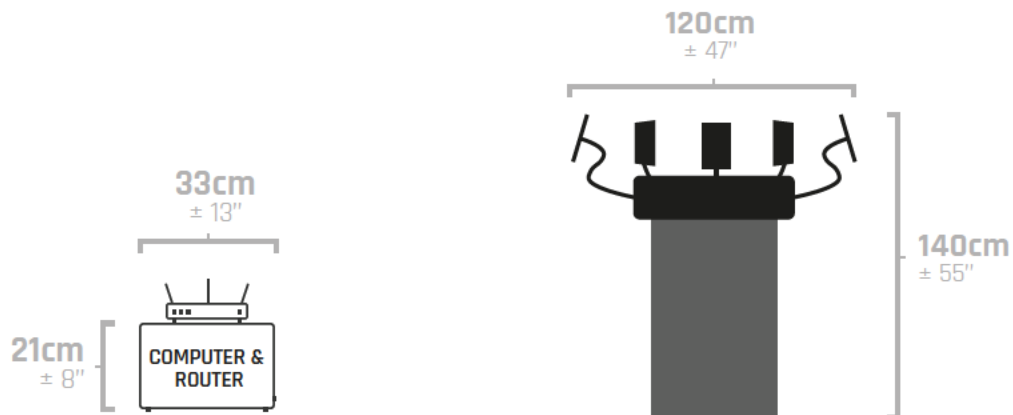

Details

- **Setup time** 2 hours (1 hour for teardown)
- **Projection** The installation can be set up with either 1 or 3 video projectors (provided by host) depending on architecture.
- **Video output** 1 HDMI or 3 DisplayPort @ 1080p / 30 FPS. Video cables (and converters) provided by host.
- **Electricity** 10A @ 120VAC or 5A @ 240VAC (input voltage can be between 100 and 250 VAC). Electrical consumption includes everything EXCEPT the power requirements of the projector(s).
- **Environment** Best in dimmed lighting (but not in darkness).
- **Stabilization** One sandbag must be provided by host.

Shipping Measurements

All the gear required by the installation (except the projectors and video cables) fits inside 2 wheeled hardcover cases (Pelican 1637 Air Case).

These cases comply with International Air Transport Association (IATA) guidelines for baggage size and weight



A

Width: 68cm (27")

Depth: 53cm (21")

Height: 38cm (15")



B



Insurance Value (6000\$ CAD)

5000\$ CAD

+

1000\$ CAD

Packing List

Computer
Router
Keyboard
Interactive installation
15x cellphones
15x Gooseneck Clips

Aluminium Rack
Cables
2x Powerbars
Extension Cord

Return Address

[REDACTED], Quebec, [REDACTED]
CANADA

The gear will travel with an official ATA Carnet (merchandise passport) for customs purposes

